




Clarion Bathware

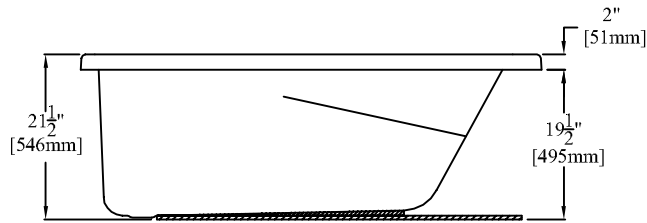

ELEVATION



SECTION "A-A"

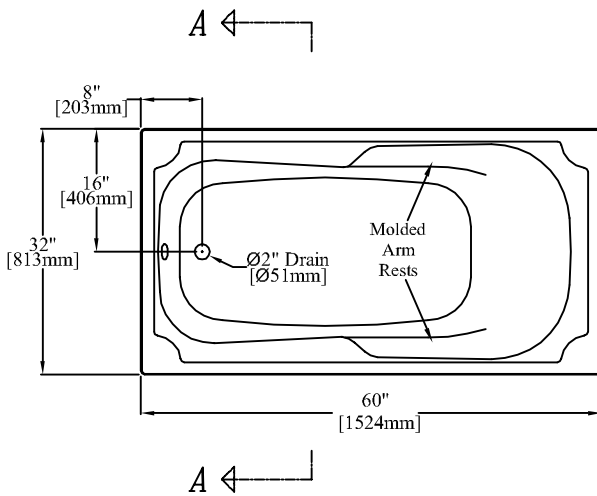

PLAN

60" [1524mm] Acrylic Drop-in Bathtub

Washington II

PRODUCT SPECIFICATIONS:

- * Product complies with NAHB, HUD UM-73A, and ANSI-Z124.1.
- * Clarion Bathware acrylic products are thermoformed from continuous cast acrylic sheet into a one piece seamless unit.
- * Wood reinforced & slip resistant floor.
- * Integral 2" [51mm] rolled edge for drop-in installation.
- * Factory drilled 2 1/2" [64mm] overflow.
- * Molded arm rests
- * Bathwell Dimensions (At Top): W-53 1/2" [1359mm]
D-23 1/2" [597mm]
H-20 3/4" [527mm]
- * Bathwell Dimensions (At Bottom): W-40" [1016mm]
D-20 1/2" [521mm]
- * Bathwell Capacity (At Overflow): 48 Gallons [163L]
- * Water Level (At Overflow): 16 3/4" [425mm]
- * This unit is available without an overflow (Model AD6032M).
- * All dimensions +/- 1/4" [6.4mm]
- * Clarion Bathware reserves the right to change design and/or dimensions.

Model AD6032

60" [1524mm] Acrylic Drop-in Bathtub

Clarion
BATHWARE
44 Amsler Ave.
Shipperville, PA 16254

Phone: (814) 226-5374
Toll Free: (800) 576-9228
Fax: (814) 226-0730
www.clarionbathware.com

Signatures For Approval:

Customer: _____
Arch./Engr: _____
Contractor: _____
Cla. Engr: _____

Date:

Dwg. Name:
AD6032-CUT

Dwg. By: DJC
DATE: 1/5/07