



Clarion Bathware

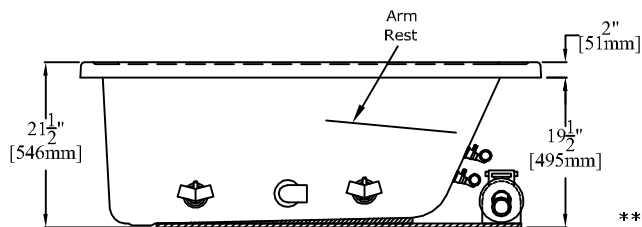


ELEVATION



SECTION "A-A"

*** For clarity, ***
the whirlpool piping
has been omitted
from this drawing

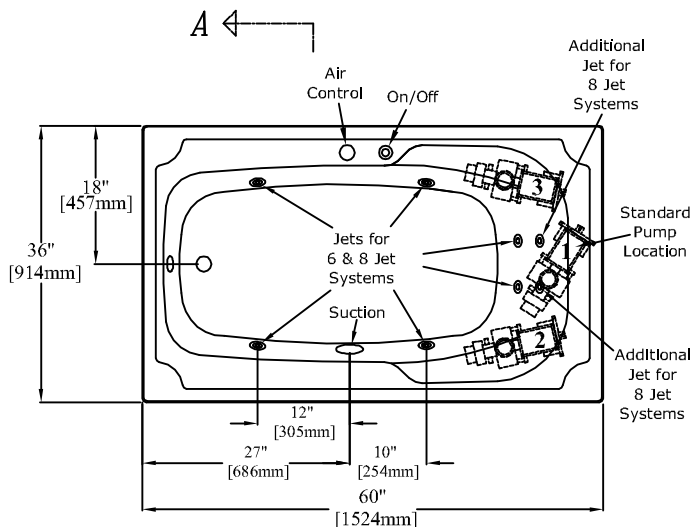

PLAN

60" [1524mm] Acrylic Drop-in Bathtub
With 6 or 8 Jet Whirlpool Package

Washington I

PRODUCT SPECIFICATIONS:

- * Product complies with NAHB, HUD UM-73A, and ANSI-Z124.1.
- * When installing this whirlpool, an access area should be provided near the location of the whirlpool pump for future access. An access area is required by many local, state & federal building codes.
- * Recommended access area dimensions: W-20" [508mm] H-15" [381mm]
- * A separate skirt with a removable access panel is available (Model AP60).
- * A tiling flange kit is available (Model TFK-1).
- * Clarion Bathware acrylic products are thermoformed from continuous cast acrylic sheet into a one piece seamless unit.
- * Wood reinforced & slip resistant floor.
- * Integral 2" [51mm] rolled edge for drop-in installation.
- * Factory drilled 2 1/2" [64mm] overflow.
- * Molded arm rests
- * Bathwell Dimensions (At Top): W-53 1/2" [1359mm] D-24 1/2" [622mm] H-20 3/4" [527mm]
- * Bathwell Dimensions (At Bottom): W-40 1/4" [1022mm] D-20 1/2" [521mm]
- * Bathwell Capacity (At Overflow): 49 Gallons [185L]
- * Water Level (At Overflow): 16 3/4" [425mm]
- * This unit is available without an overflow (Model AD6036M:6 or AD6036M:8).
- * The pump positions labeled 2 & 3 are alternate pump locations that are available.
- * All dimensions +/- 1/4" [6.4mm]
- * Clarion Bathware reserves the right to change design and/or dimensions.

AD6036:6 or AD6036:8

60" Acrylic Drop-in Bathtub with a 6 or 8 Jet Whirlpool Package

Clarion
BATHWARE
44 Amsler Ave.
Shippenville, PA 16254

Phone: (814) 226-5374
Toll Free: (800) 576-9228
Fax: (814) 226-0730
www.clarionbathware.com

Signatures For Approval:

Customer: _____
Arch./Engr: _____
Contractor: _____
Cla. Engr: _____

Date:

Dwg. Name:
AD6036
-6&8JETCUT
Dwg. By: DJC
DATE: 5/20/08